

TECHNICAL SHEETS


COD. 3666

GIUNTO DI TRANSIZIONE ACCIAIO-PE
FILETTATO MASCHIO RIVESTITO

STEEL TO PE TRANSITION FITTING
MALE THREADED - COVERED



COD	D1xG	L1	L2	L3
3666025003001	25x3/4"	300	86	480
3666032004001	32x1"	300	94	490
3666040005001	40x1 1/4"	300	104	495
3666050006001	50x1 1/2"	300	114	510
3666063007001	63x2"	300	131	530
3666075008001	75x2 1/2"	300	134	545
3666090009001	90x3"	300	151	560
3666110010001	110x4"	300	169	580
3666125010001	125x4"	300	200	650

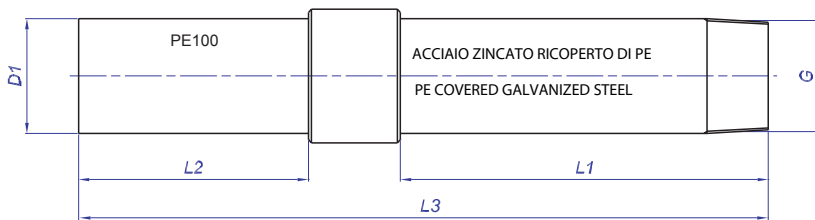

PE100 - SDR11 - S5

ACQUA: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; In Italia MOP=5 bar
(D.M. 24/11/84 e successive modifiche)

WATER: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; In Italy MOP=5 bar
(D.M. 24/11/84 and further modification)