


TECHNICAL SHEETS

| COD. 3686 | COD | D1xG | L1 | L2 | L3 | R |
|--|---------------|-----------|-----|-----|-----|-----|
| GIUNTO DI TRANSIZIONE ACCIAIO-PE FILETTATO MASCHIO ZINCATO STEEL TO PE TRANSITION FITTING - MALE THREADED - GALVANIZED | 3686025003001 | 25x3/4" | 848 | 229 | 181 | 104 |
| | 3686032004001 | 32x1" | 819 | 271 | 189 | 129 |
| | 3686040005001 | 40x1 1/4" | 802 | 328 | 199 | 166 |
| | 3686050006001 | 50x1 1/2" | 792 | 411 | 214 | 205 |
| | 3686063007001 | 63x2" | 829 | 406 | 234 | 265 |

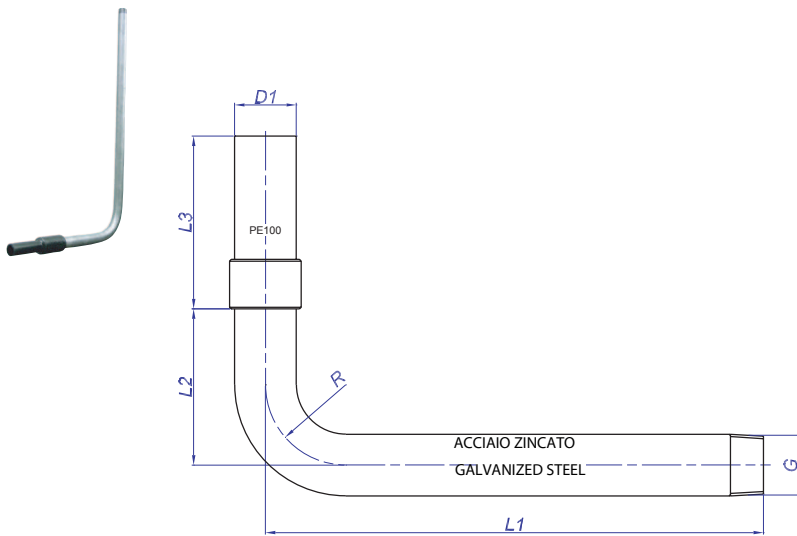

PE100 - SDR11 - S5

ACQUA: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; In Italia MOP=5 bar
(D.M. 24/11/84 e successive modifiche)

WATER: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; In Italy MOP=5 bar
(D.M. 24/11/84 and further modification)