




CODE 3636

Giunto di transizione ottone PE filettato femmina
PE100/SDR 11 - S5 Gas - PN 16 20°C

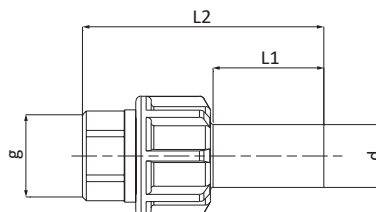

PE100 - SDR11 - S5
ACQUA: PFA (PN)=16 bar 20°C
GAS: MOP=10 bar; In Italia MOP=5 bar (D.M. 24/11/84, D.M. 16/4/2008 e successive modifiche)

CODE	DIM dxg [mmxin.]	L1 [mm]	L2 [mm]	PACK	
				RIF. 2	RIF. 11
3636020002001	20x1/2"	42	85	-	70
3636025003001	25x3/4"	44	103	-	45
3636032004001	32x1"	47	111,5	-	30
3636040005001	40x1"1/4	52	124	-	15
3636050006001	50x1"1/2	58	135	-	10
3636063007001	63x2"	66	153	-	6
3636075008001	75x2"1/2	73	165	6	-
3636090009001	90x3"	82	181	6	-
3636110010001	110x4"	90	160	4	-