




Inserto flangiato - Flanged insert - Bout bride - Punta de brida - Spitze des Flansches - Фланцевый переходник



CODE
1053

CODE
A223

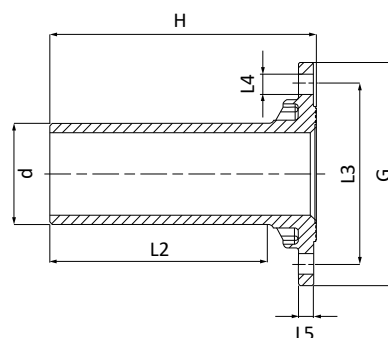

DIM d (DN) [mm]	CODE	DIM MAX LxHxP [mm]	G [mm]	H [mm]	L2 [mm]	L3 [mm]	L4 [mm]	L5 [mm]	NF	PN [bar]	PACK [UMV] RIF. 5
63 (DN50)	1053063000001	170x201x170	170	201	169	125	18	12	4	16	23
63 (DN65)	1053063001001	183x201x183	183	201	164	145	18	12	4	16	23
75 (DN65)	1053075000001	183x217x183	183	217	184	145	18	12	4	16	18
75 (DN80)	1053075001001	200x217x200	200	217	177	160	18	12	8	16	16
90 (DN80)	1053090000001	200x240x200	200	240	199	160	18	14	8	16	9
110 (DN80)	1053110001001	200x305x200	200	305	272	160	18	14	8	16	8
110 (DN100)	1053110000001	224x305x224	224	305	265	180	18	14	8	16	7


Flangia abbinabile da ordinare separatamente - Matching flange to be ordered separately

La bride correspondente est à commander séparément - La brida compatible se vende por separado


Die passende Flansch muss separat bestellt werden - Фланец в комплект не входит

Flangia in acciaio zincato - Galvanized steel flange - Bride en acier zingué - Brida de acero cincado - Flansch aus verzinktem Stahl - Фланец из оцинкованной стали

DIM [mm]	CODE	NF	PACK [UMV]
63 (DN50)	A223000003	4	-
63 (DN65)	A223000004	4	-
75 (DN65)	A223000005	4	-
75 (DN80) 90 (DN80) 110 (DN80)	A223000007	8	-
110 (DN100)	A223000009	8	-



CODE 1006



CODE 1005

ESEMPIO D'INSTALLAZIONE / EXAMPLE OF USE

Idoneo all'inserimento nell'uscita a compressione dei raccordi Unidelta

Suitable for insertion into the compression exit of Unidelta fittings

Approprié pour l'insertion des raccords à compression Unidelta

Apto para inserción en la salida de compresión de los accesorios Unidelta

Zum Einfügen in das Gewinde von den Klemmverbindungen Unidelta geeignet

Подходит для вставки в компрессионную муфту фитингов Unidelta